

Fig. 1

2/17

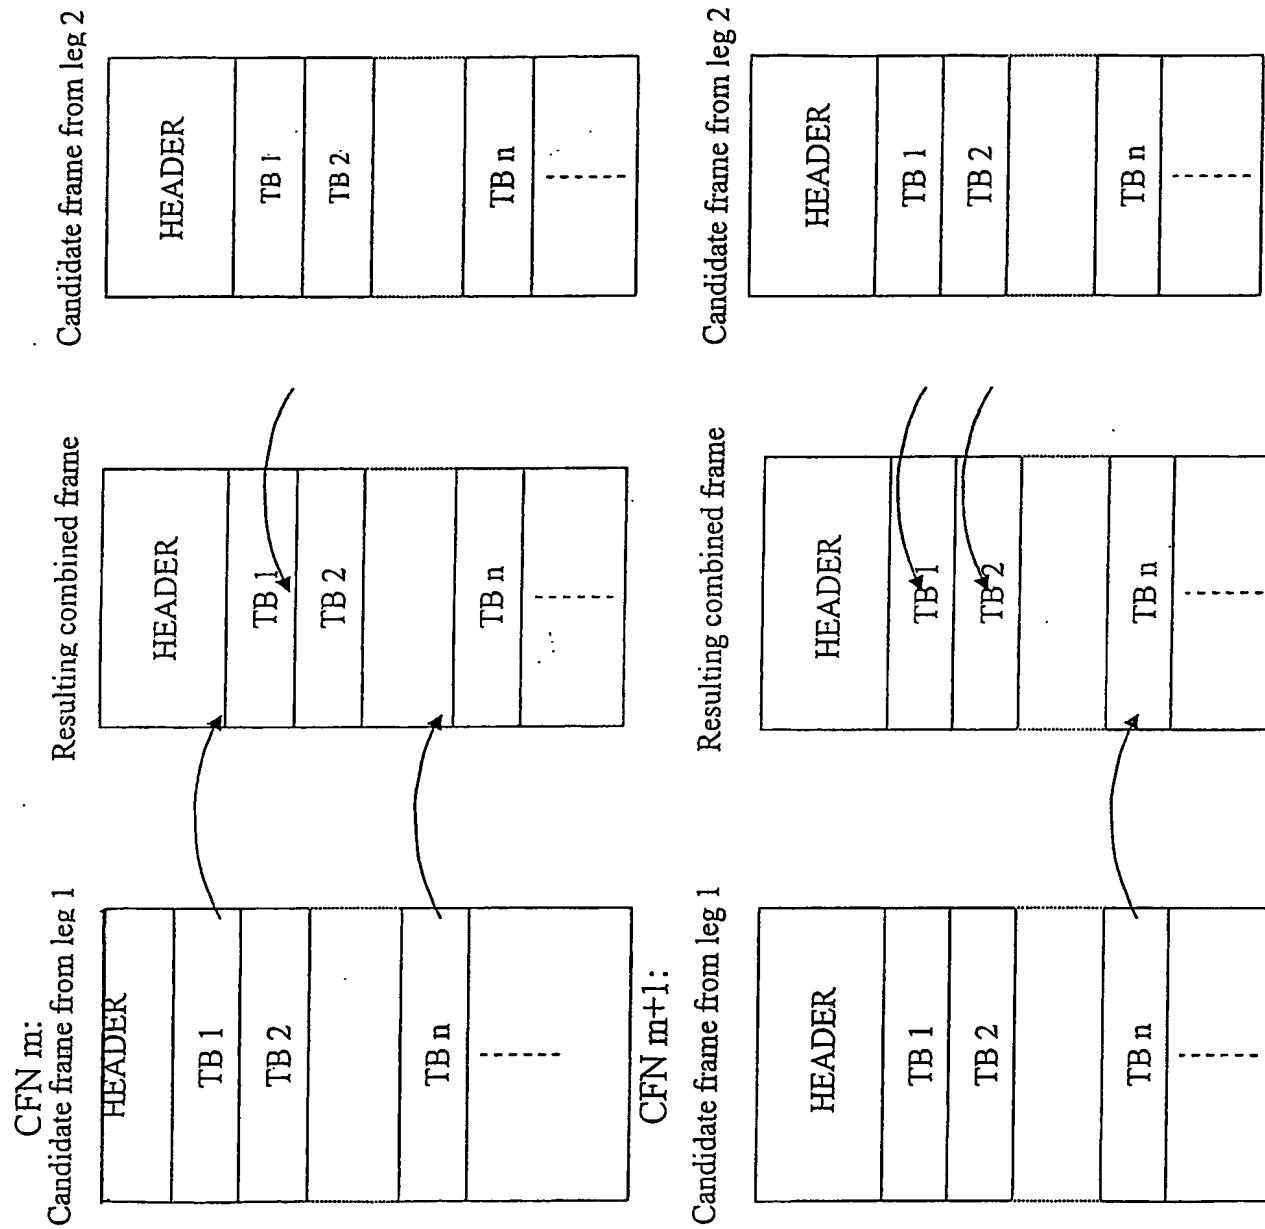


Fig. 2

3/17

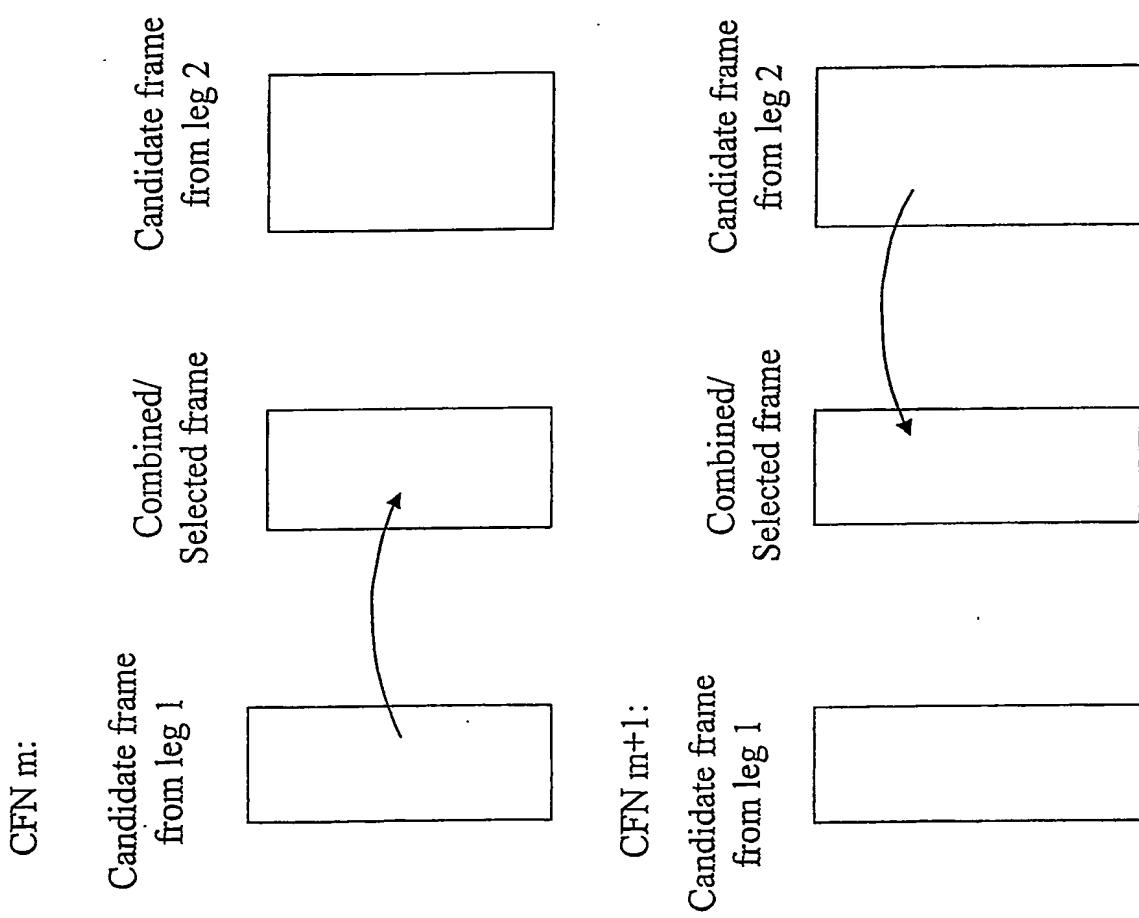


Fig. 3

4/17

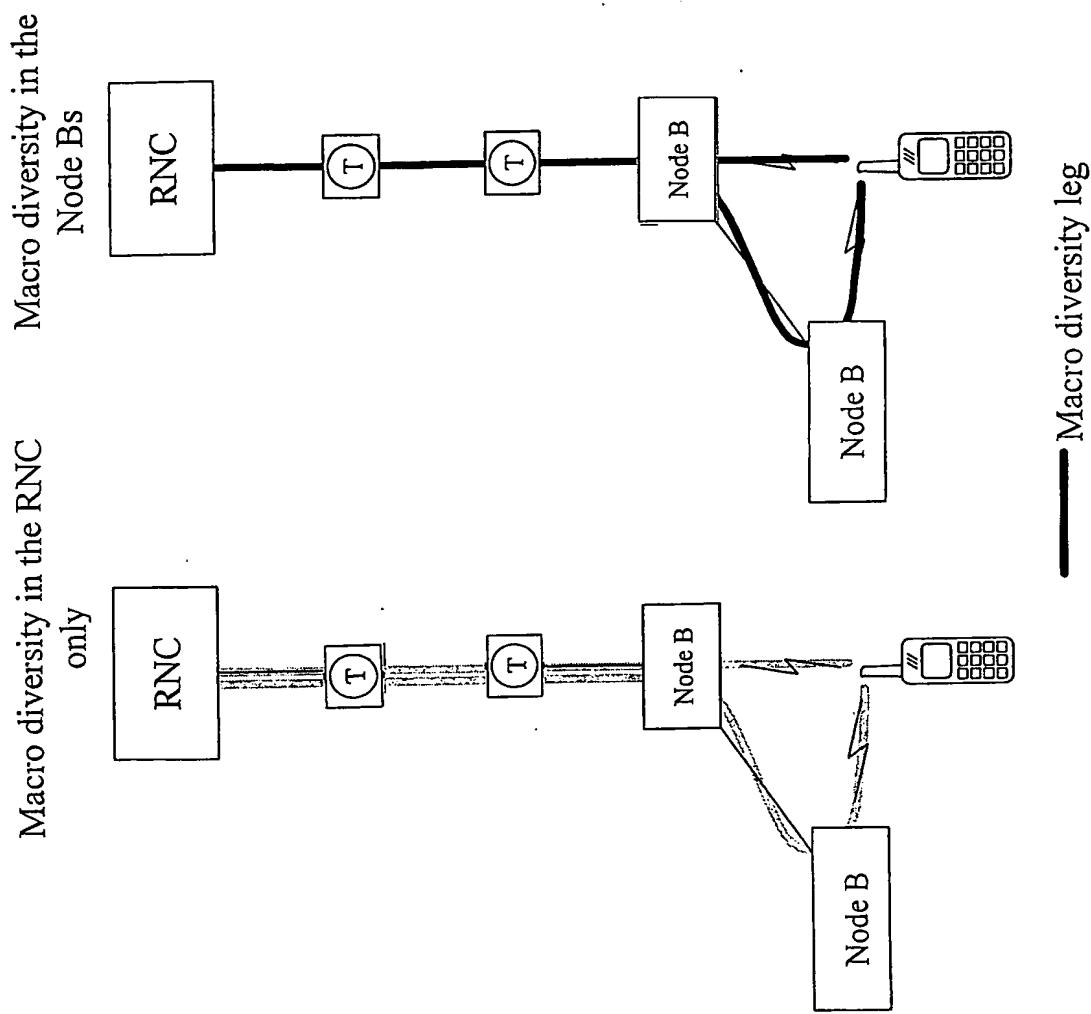


Fig. 4

5/17

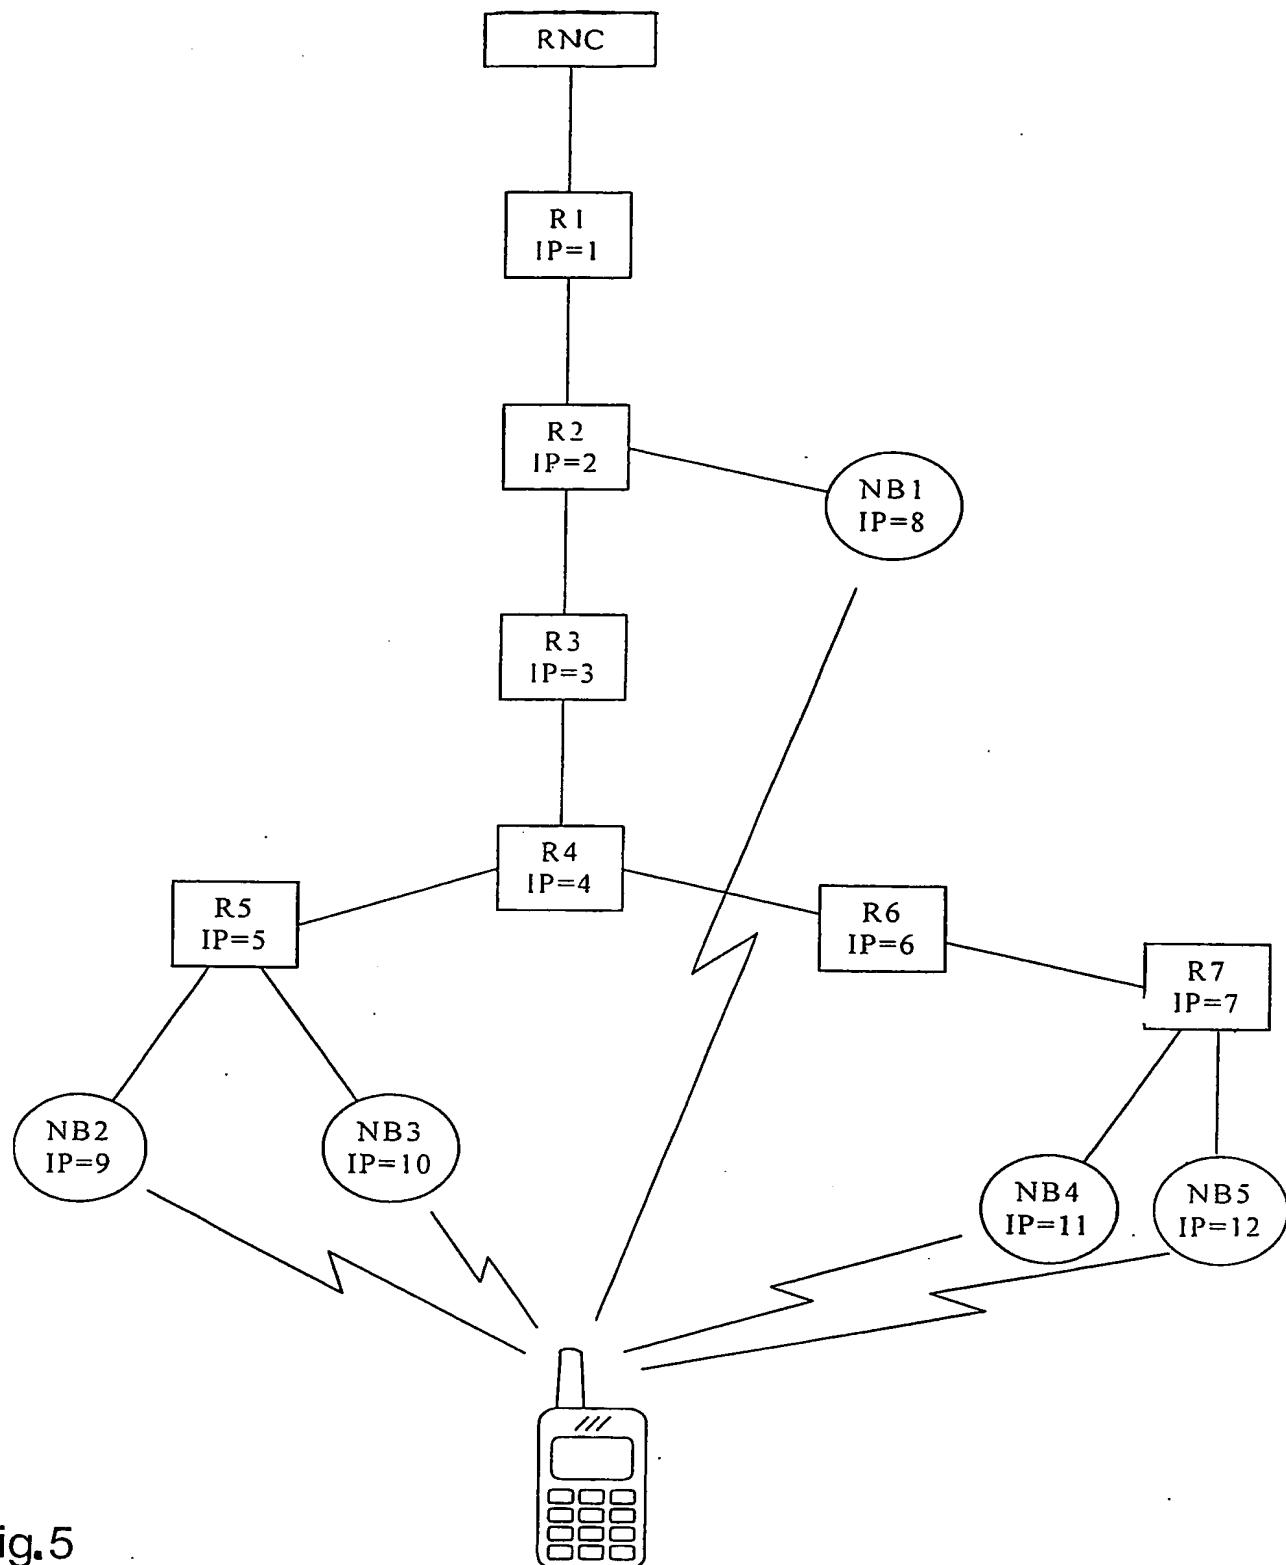


Fig.5

6/17

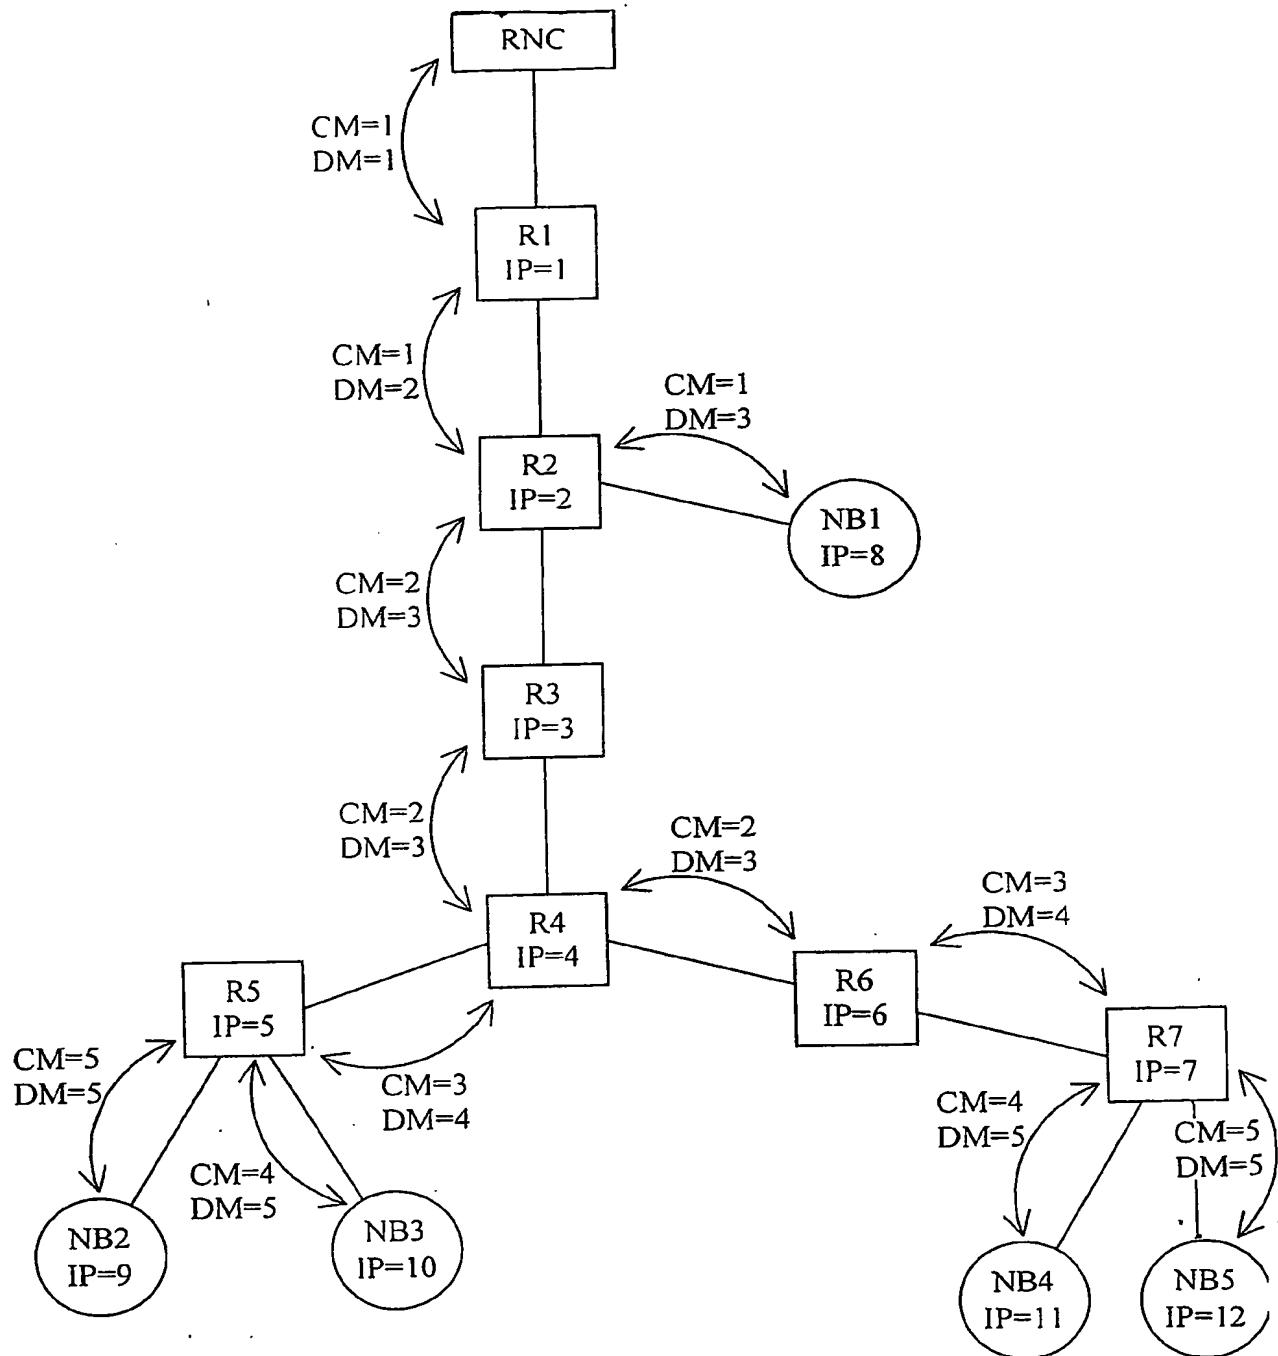


Fig. 6

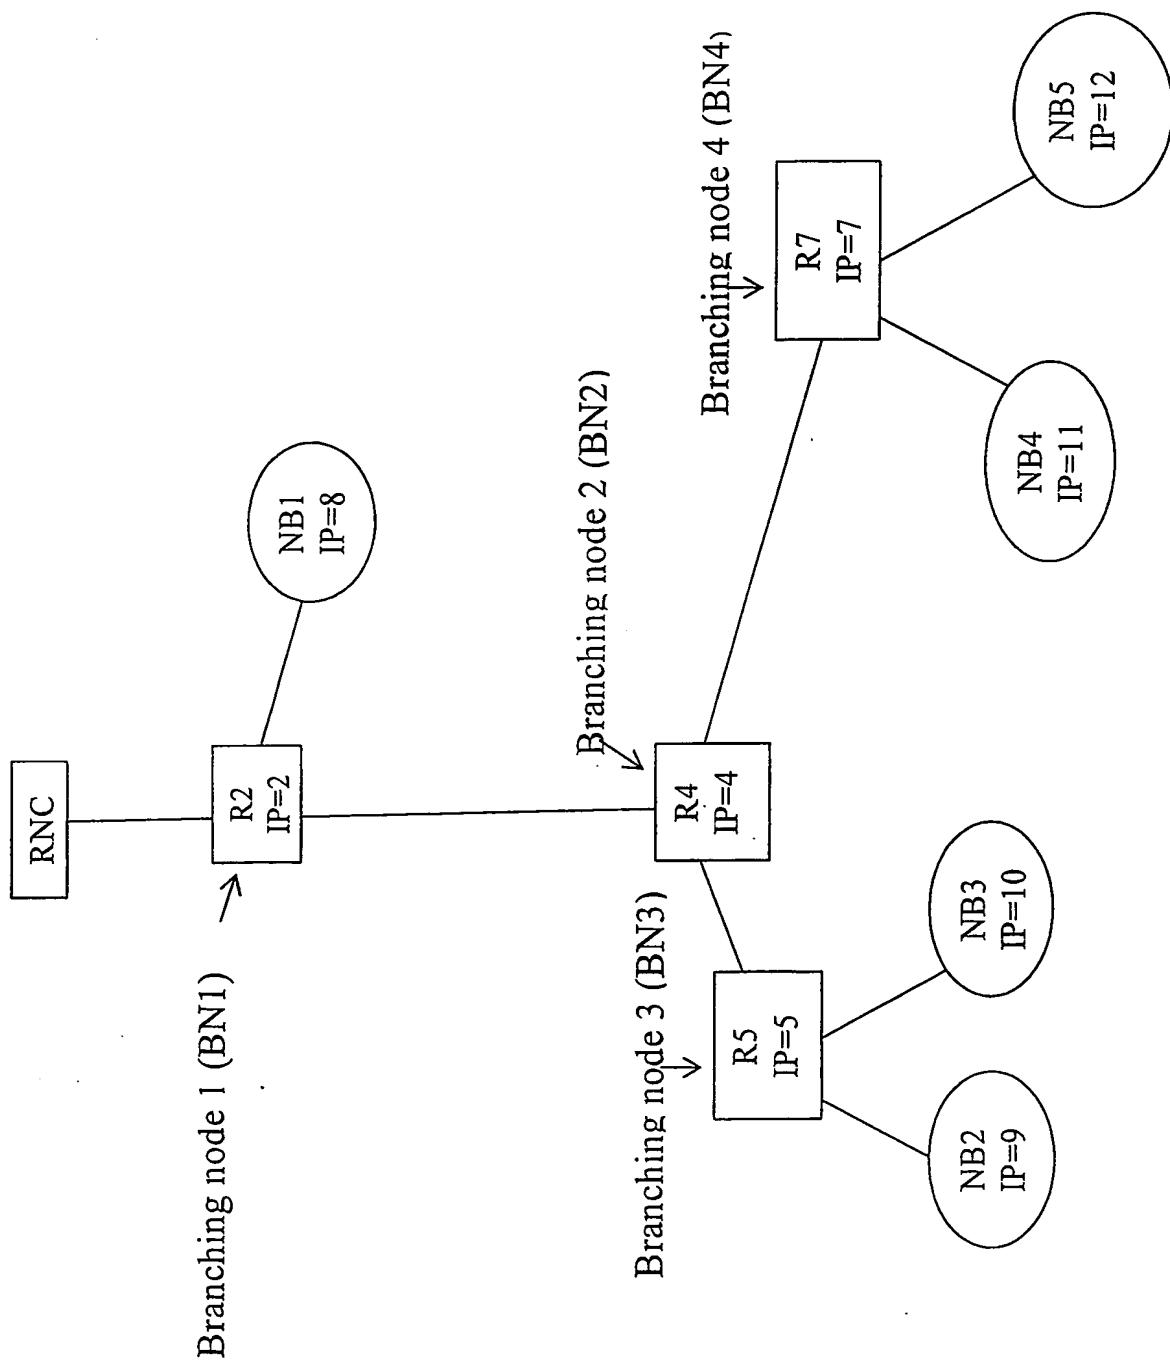


Fig. 7

8/17

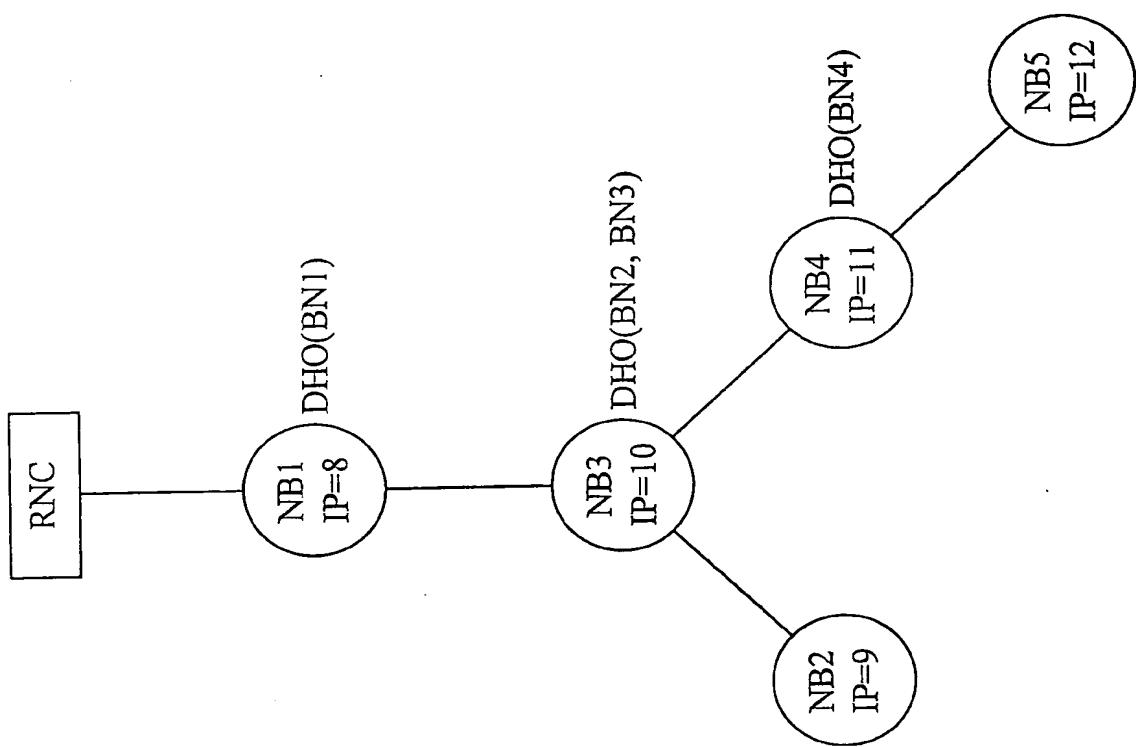


Fig. 8

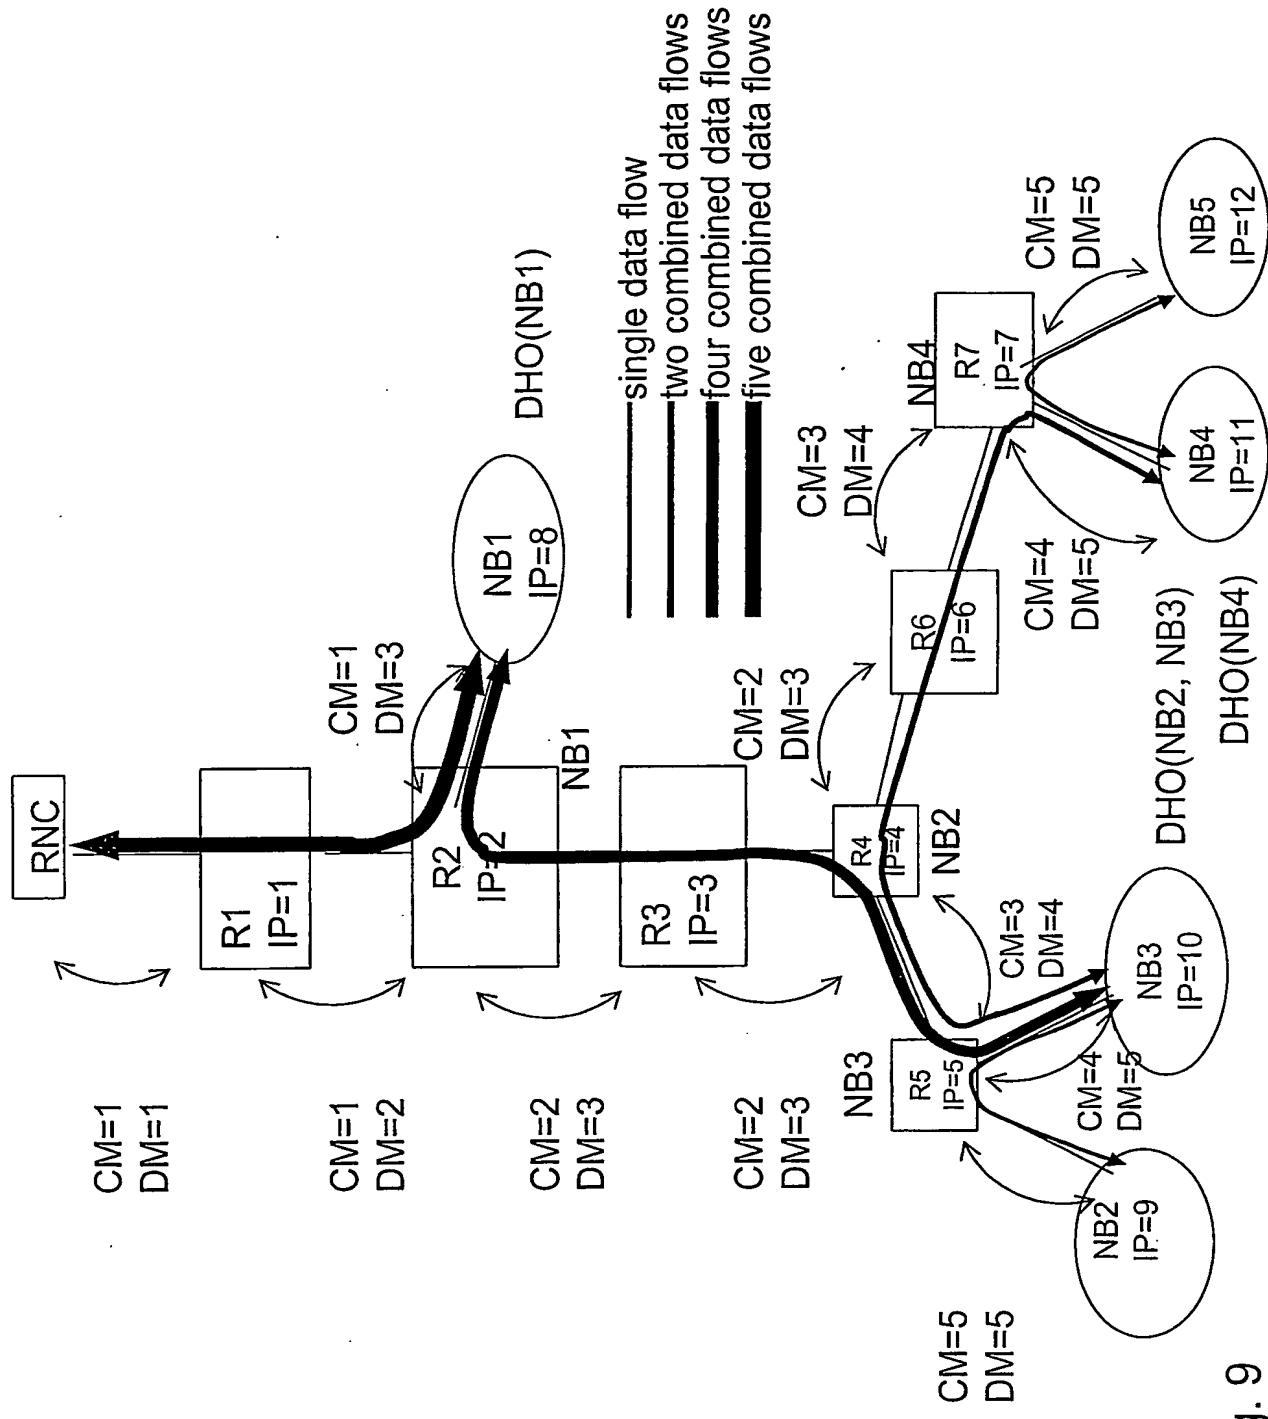


Fig. 9

10/17

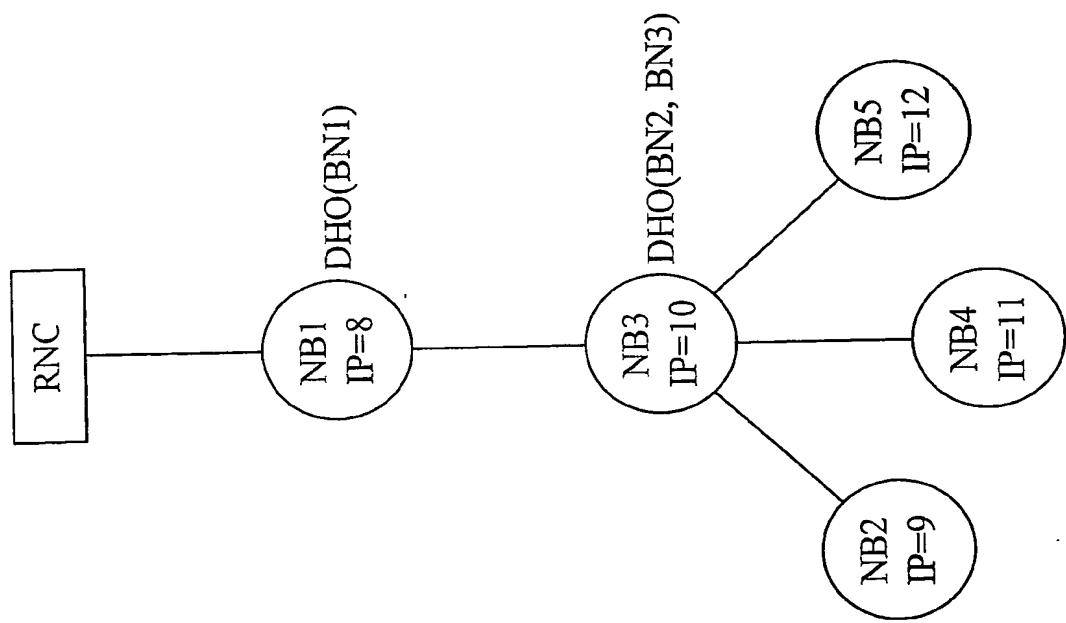


Fig. 10

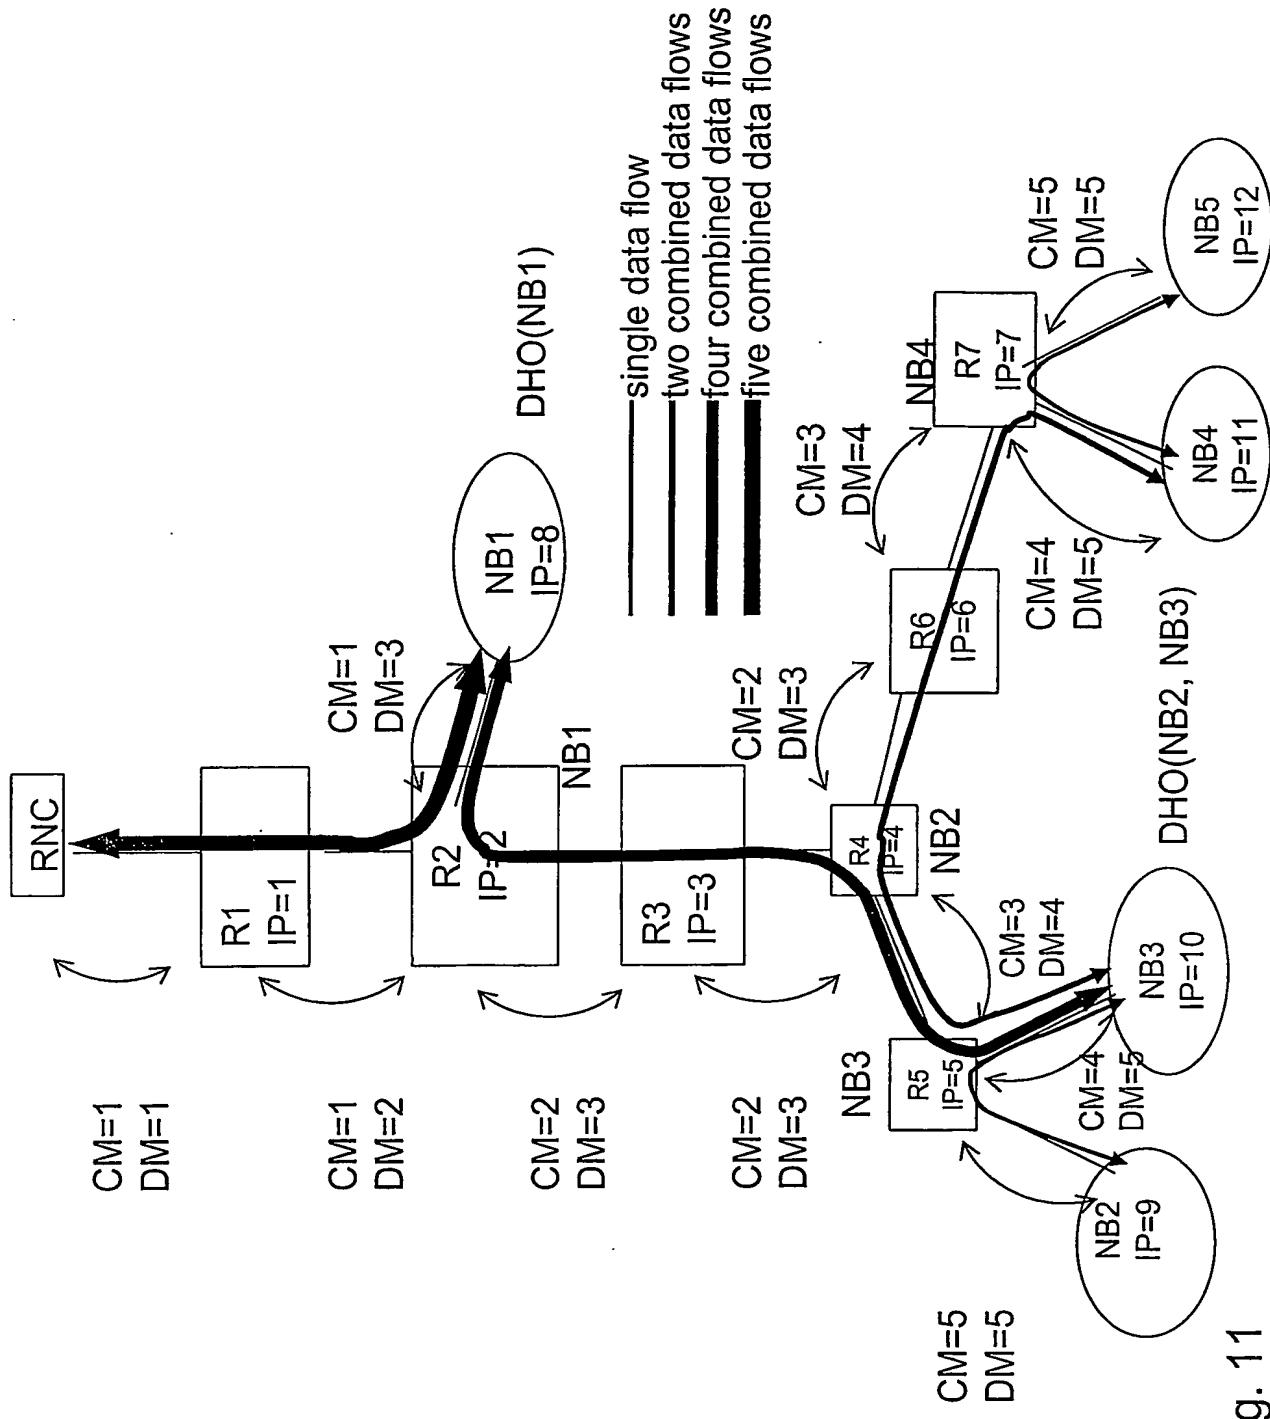


Fig. 11

12/17

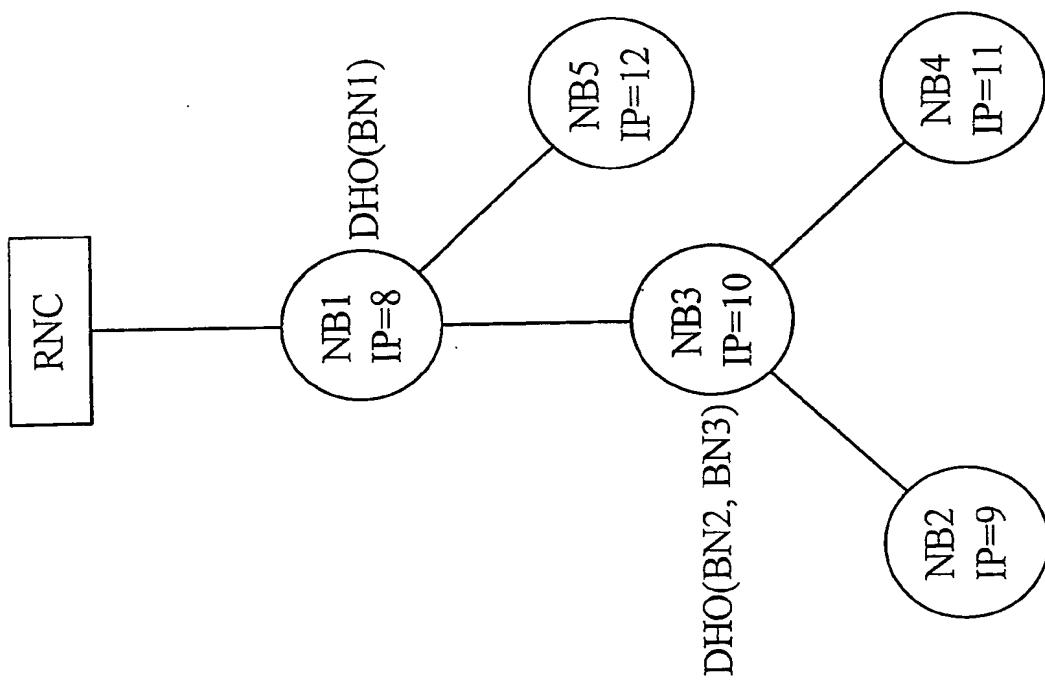


Fig. 12

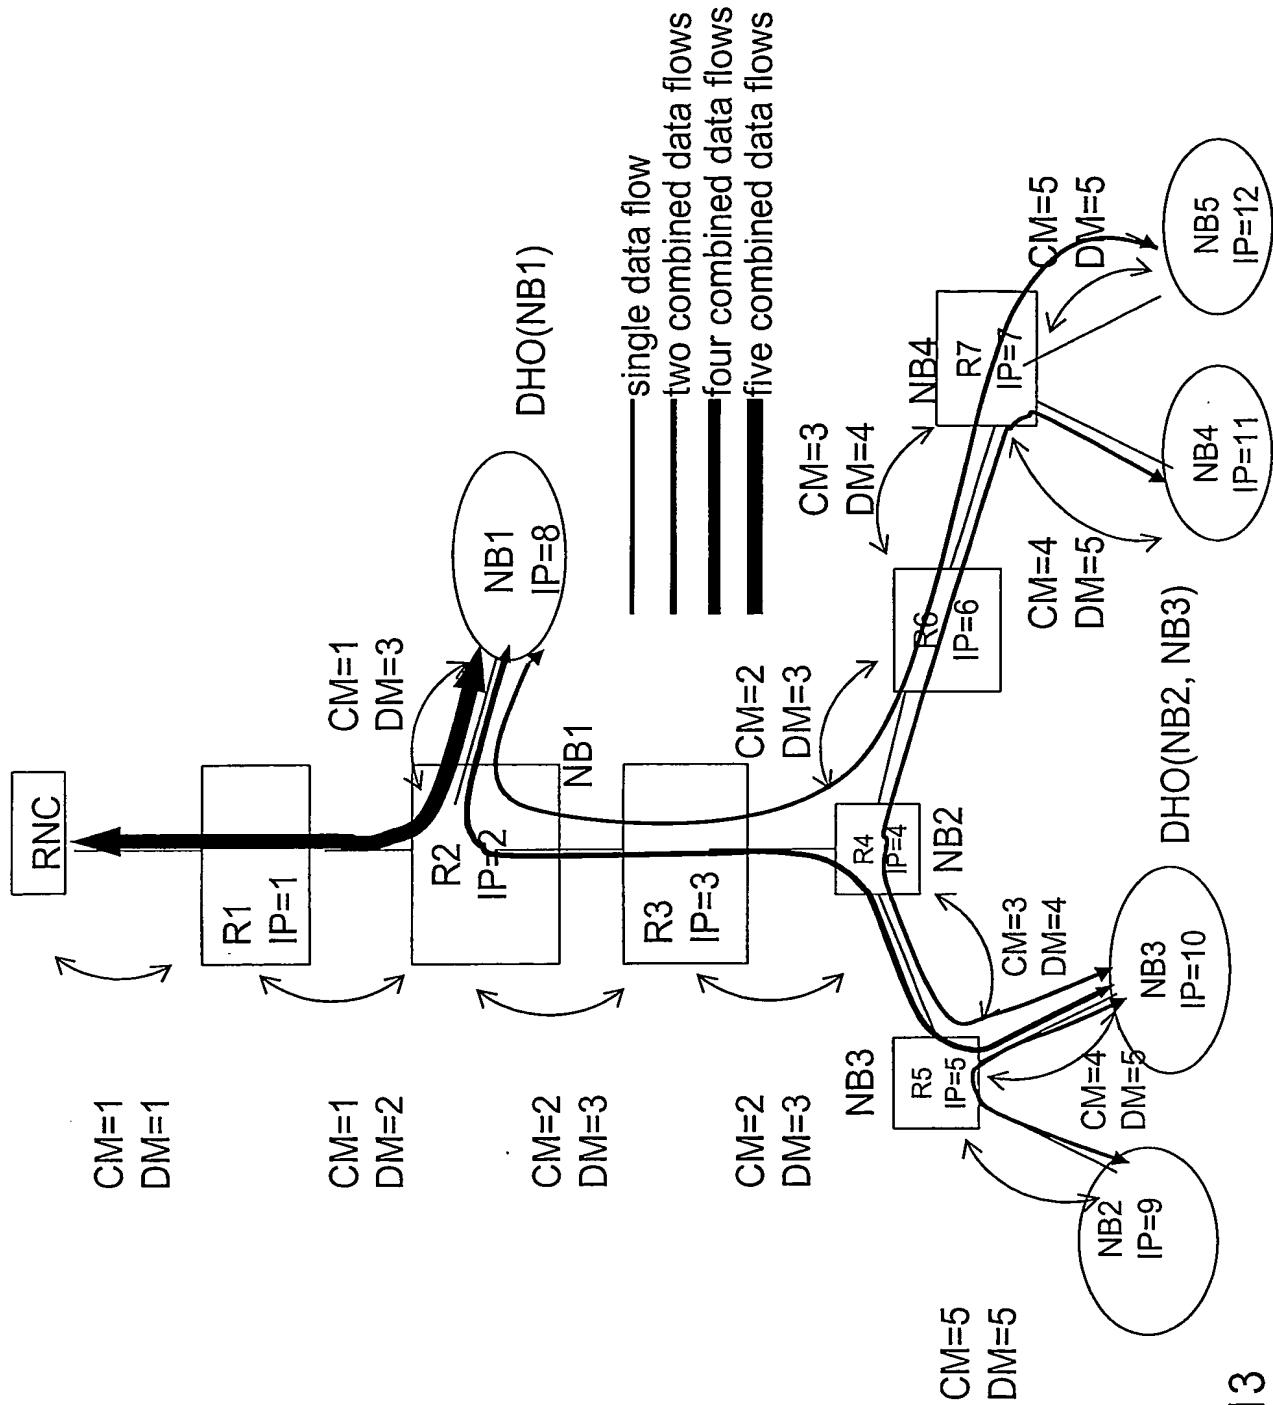


Fig. 13

14/17

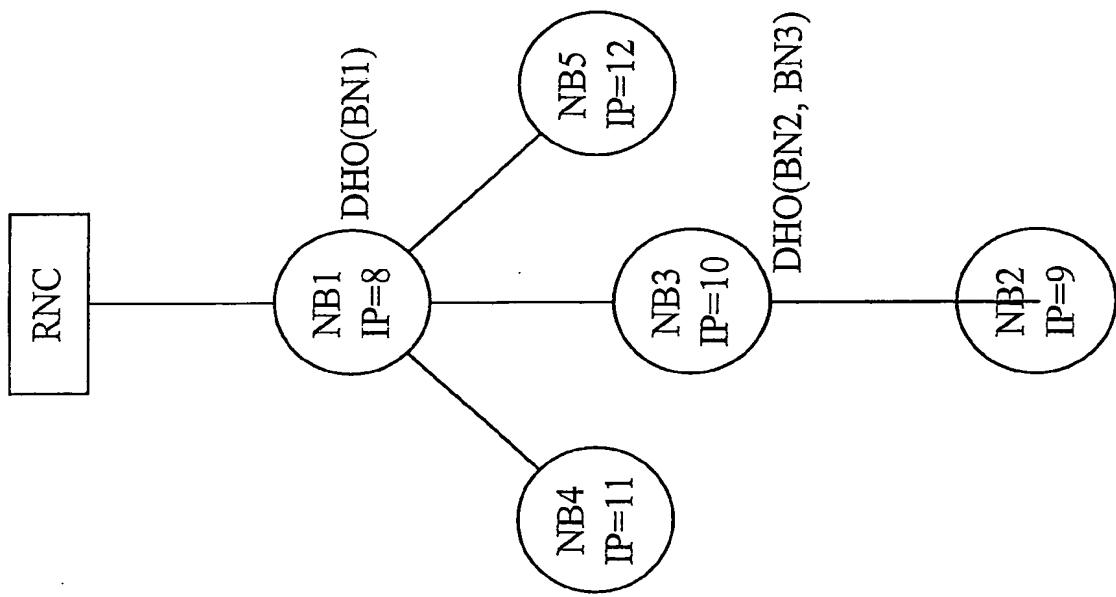


Fig. 14

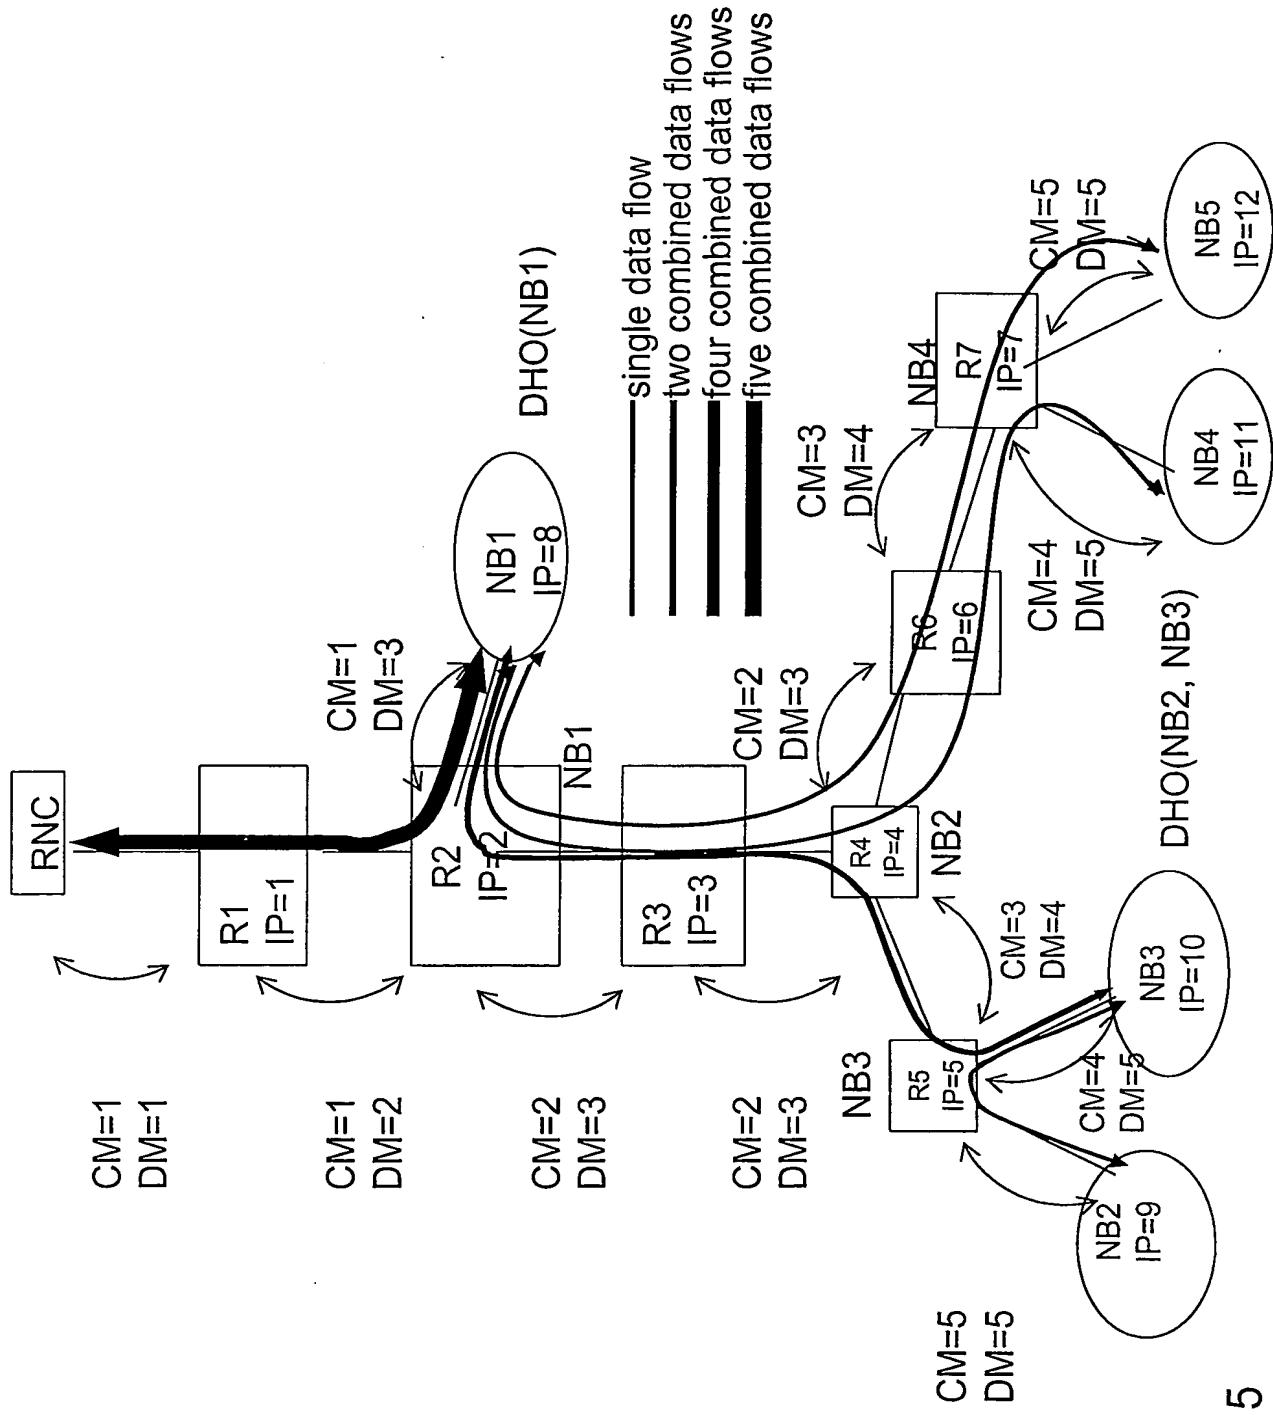


Fig. 15

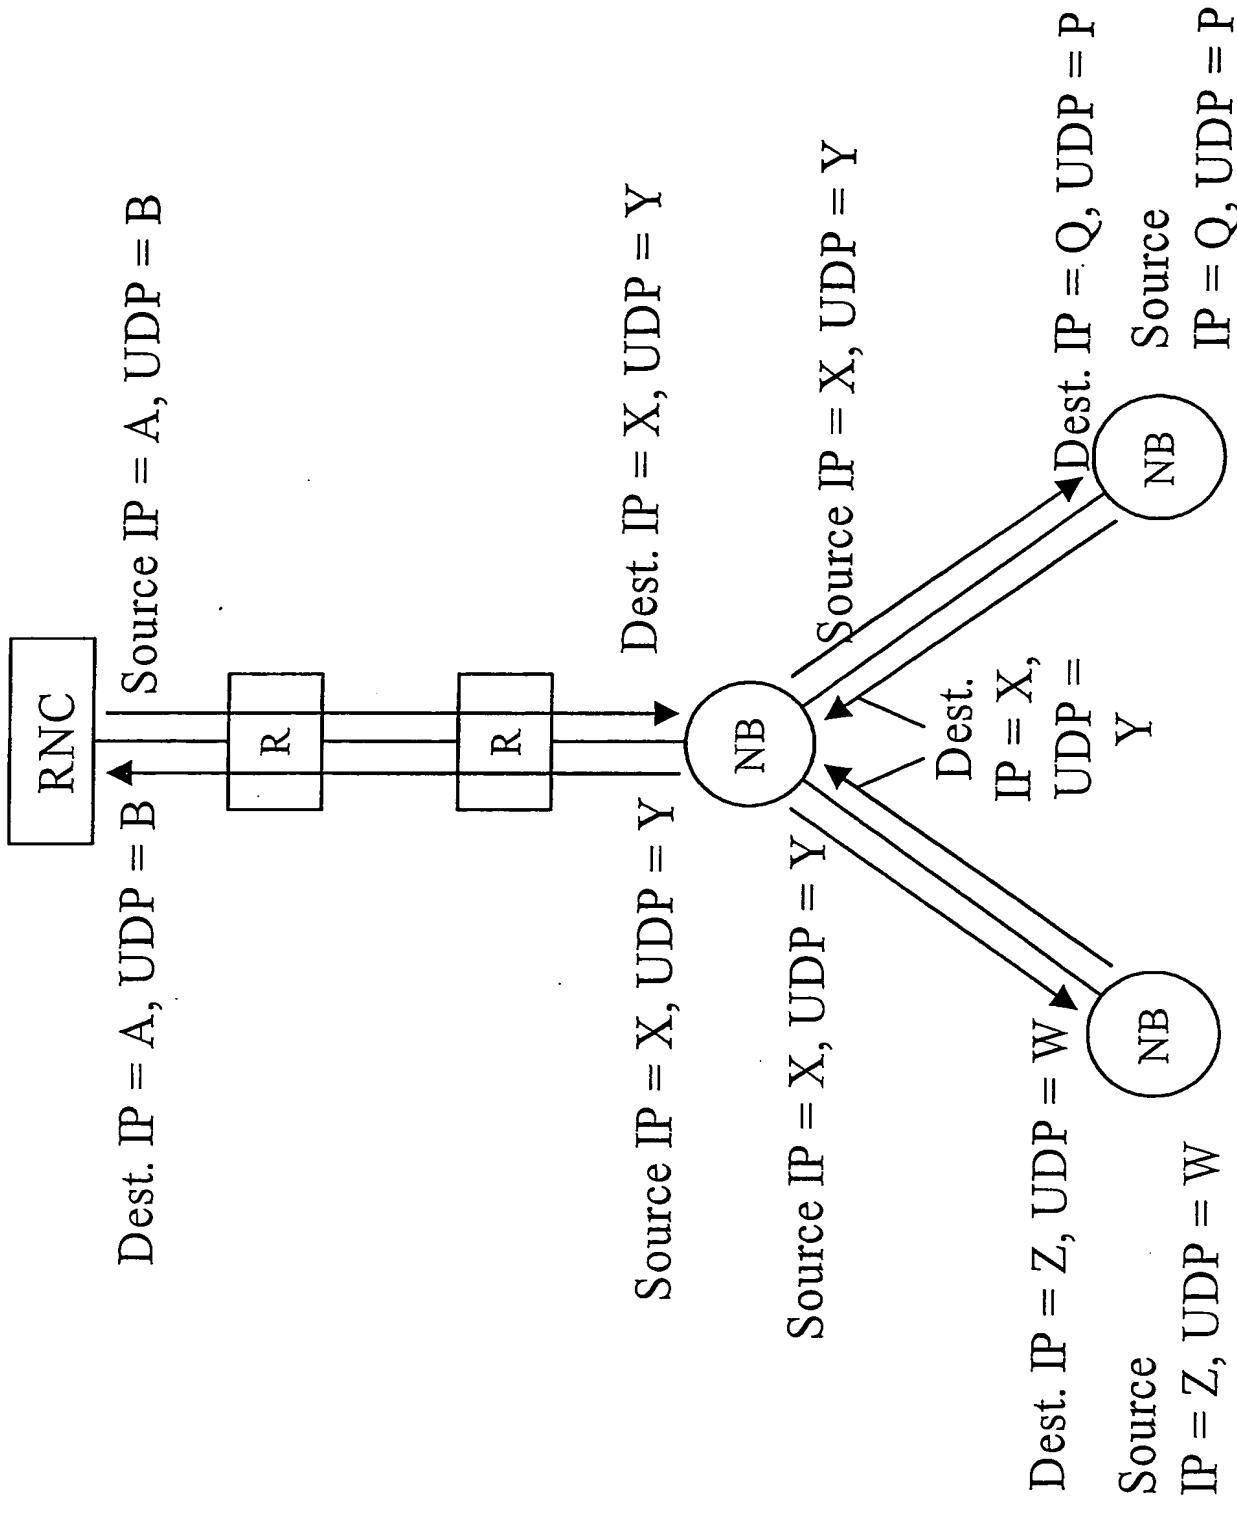


Fig. 16

17/17

1701

Include in a first signalling message one or more transport layer addresses and one or more transport bearer reference parameters in order to direct one or more data flows of the DHO connection

1702

Send said first signalling message to the first DHO node.

Fig. 17